

Wellhead Oil Recovery

Medium and high-end wellhead equipment and manifolds

140MPa fracturing gas wellhead


High Sulfur-Resistant and High Pressure Wellhead & Christmas Tree Solution

Reference standards: API 6A, ISO10423, GB/T22513 and NACE 0175

This product is suitable for the use in 140MPa high pressure working condition and is mainly used in productivity testing, acidizing, fracturing, well completion, gas production and other working conditions.

Product Features

- Consisting of a tubing head and multiple large-diameter fracturing gate valves and safety valves
- Maximum diameter of 7-1/16 "and maximum pressure of 20,000 psi
- Compact structure, small size and light weight for easy installation
- Used for high-pressure and large-diameter manual valves, and designed with a ball screw structure to reduce switching torque
- Compact design to greatly reduce ground area and height
- Stable and reliable in long-term use, with a long service life

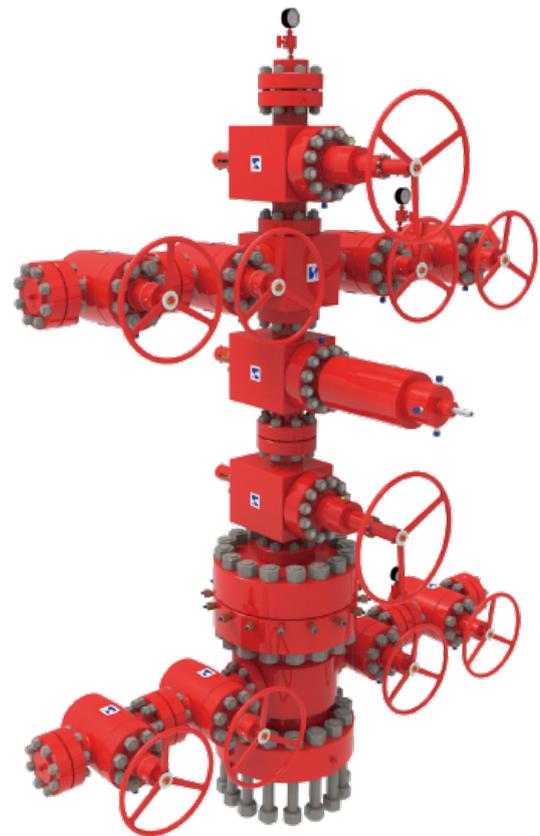

7-1/16"

Maximum diameter of 7-1/16

20000psi

Maximum pressure of 20,000psi

Compact structure

Compact structure, small size and light weight for easy installation